

INFORMATION SUR LE PRODUIT

Le Z-Barre est disponible en longueur de 10'-0" et fabriqué selon nos normes ou sur mesure.

Le Z-Barre est conçu pour supporter différentes épaisseurs d'isolant rigide, aussi bien pour l'enveloppe extérieure que l'enveloppe intérieure.


La galvanisation et l'acier utilisé respectent les normes établies par l'ICTAB, notamment la norme G60 (Z180), qui s'applique à l'ensemble des calibres disponibles.

CALIBRE DISPONIBLE

- 16G
- 18G
- 20G
- 22G
- 24G

PERFORATION

Nous offrons également la possibilité de perforer le Z-barre selon vos besoins spécifiques.

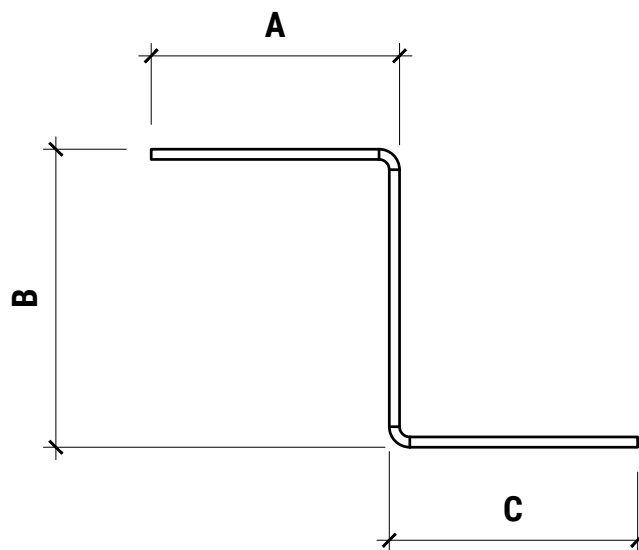

DIMENSIONS STANDARDS

A		B		C	
PO	MM	PO	MM	PO	MM
		1"	25.4		
		1-1/2"	38.1		
		2"	50.8		
		2-1/2"	63.5		
		3"	76.2		
1-1/4"	31.8	3-1/2"	88.9	1-1/4"	31.8
		4"	101.6		
		4-1/2"	114.3		
		5"	127.0		
		5-1/2"	139.7		
		6"	152.4		

PRODUCT INFORMATION

The Z-Barre is available in lengths of 10'-0" and manufactured to our standards or custom-made.

The Z-Barre is designed to support different thicknesses of rigid insulation, both for the exterior envelope and the interior envelope.


The galvanizing and the steel used comply with the standards established by the CSSBI, in particular the G60 (Z180) standard, which applies to all available gauges.

AVAILABLE GAUGE

- 16G
- 18G
- 20G
- 22G
- 24G

PERFORATION

We also offer the possibility of perforating the Z-bar according to your specific needs.

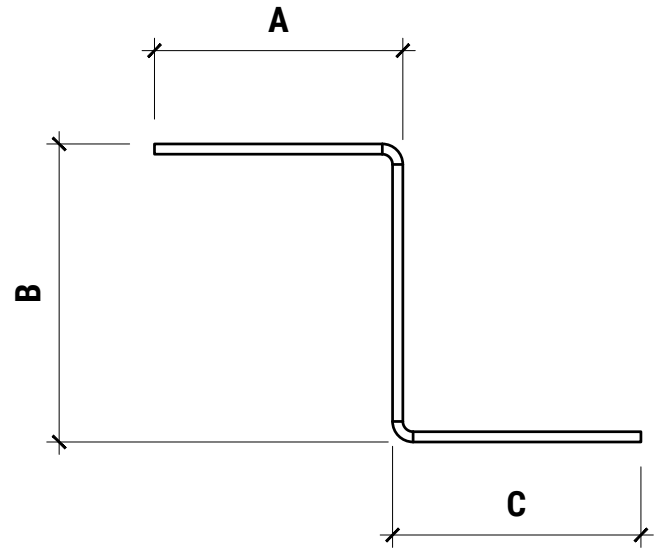

STANDARDS DIMENSIONS

A		B		C	
PO	MM	PO	MM	PO	MM
		1"	25.4		
		1-1/2"	38.1		
		2"	50.8		
		2-1/2"	63.5		
		3"	76.2		
1-1/4"	31.8	3-1/2"	88.9	1-1/4"	31.8
		4"	101.6		
		4-1/2"	114.3		
		5"	127.0		
		5-1/2"	139.7		
		6"	152.4		